



N-SERIES

For additional information on Isuzu's full line of Low Cab Forward trucks please visit www.isuzucv.com or call **(866) 441-9638**



All photographs, illustrations, equipment and technical data in this brochure are based on the latest information available at the time of publication. Isuzu Commercial Truck of America, Inc. reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications and models, and to discontinue models or equipment. Isuzu vehicles are assembled from component parts manufactured by Isuzu Motors Limited, its affiliated companies, and by independent suppliers who manufacture such components to Isuzu's exacting standards for quality, performance and safety. Some vehicles are shown with optional equipment. Some equipment is dealer installed. Visit your authorized Isuzu dealer for warranty and other details. NPR, NPR-HD, NPR-XD, NQR, and NRR are trademarks of Isuzu Motors Limited. ECO-MAX is a registered trademark of Isuzu Commercial Truck of America, Inc. Truck bodies represented herein are products of Supreme Corporation, M.H.Eby, Inc., Morgan Corporation, The Reading Group LLC, Tymco, Inc., Switch N Go a division of Deist Industries, Inc., Aero Tech Manufacturing, Inc., Thermo King, and New Way Refuse Trucks a product of Scranton Manufacturing Company. Facebook is a registered trademark of Facebook, Inc.



Isuzu Provides Choices that Deliver Outstanding Performance with a Lower Cost of Ownership



- Choice of Two Diesel Engines
- Gas Engine with CNG/LPG Capability



Fuel Economy

Match Engine Power to Your Delivery Requirements

Vehicle Service and Support Programs that Provide Remarkable Lifecycle Value



Vehicle Health Reports

Performed at each scheduled maintenance cycle, this report provides operational data that helps maximize a lower cost of ownership



24/60K Covered Maintenance

This program provides scheduled maintenance at no cost for up to 24 months or 60,000 miles, whichever comes first.



PSMP

Continuing maintenance program that promotes maximum vehicle uptime



Isuzu Financing

Competitive leasing and financing options for your budget needs

N-SERIES DIESEL

Standard Cab:

Body choices 10 ft. to 24 ft.*
GVWRs 12,000 lbs. to 19,500 lbs.
Wheelbases 109.0 in. to 212.0 in.

Crew Cab: Seating for Seven

Body choices 12 ft. to 16 ft.*
GVWRs 14,500 lbs. to 17,950 lbs.
Wheelbases 150.0 in. to 176.0 in.

Easy to Drive: Outstanding driver visibility and maneuverability that provides an exceptional driving experience

ISUZU NPR_{XD}

Mid-Range Applications

215 hp. 5.2L Diesel Power
16,000 lb. GVWR



Diesel Engine Choices:



150hp 3.0L



215hp 5.2L

Isuzu diesel engines have a B-10 engine life of 310,000 miles



150 hp. 3.0L
12,000 lb. GVWR
Body of your choice up to 18 ft.*



215 hp. 5.2L
14,500 lb. GVWR
Body of your choice up to 20 ft.*



CREW CAB
215 hp. 5.2L
14,500 lb. GVWR
Body of your choice up to 16 ft.*




215 hp. 5.2L
16,000 lb. GVWR
Body of your choice up to 20 ft.*




CREW CAB
215 hp. 5.2L
16,000 lb. GVWR
Body of your choice up to 16 ft.*



215 hp. 5.2L
17,950 lb. GVWR
Body of your choice up to 22 ft.*



CREW CAB
215 hp. 5.2L
17,950 lb. GVWR
Body of your choice up to 16 ft.*



215 hp. 5.2L
19,950 lb. GVWR
Body of your choice up to 24 ft.*

* Wheelbase dimension determines maximum body length

N-SERIES GAS

The Only Gas Low Cab Forward in the Medium Duty Market

Standard Cab:

Body choices 10 ft. to 20 ft.*
GVWRs 12,000 lbs. to 14,500 lbs.
Wheelbases 109.0 in. to 176.0 in.

Crew Cab: Seating for Seven

Body choices 12 ft. to 16 ft.*
GVWRs 12,000 lbs. to 14,500 lbs.
Wheelbases 150.0 in. to 176.0 in.

Easy to Drive: Outstanding driver visibility and maneuverability that provides an exceptional driving experience



Gas Choices

297hp 6.0L with
CNG/LPG Capability



ISUZU **NPR**

Gas or CNG/LPG Capable
12,000 lb. GVWR

Body of your choice
up to 20 ft.*

ISUZU **NPR HD**

Gas or CNG/LPG Capable
14,500 lb. GVWR

Body of your choice
up to 20 ft.*

ISUZU **NPR**

CREW CAB
Gas or CNG/LPG Capable
12,000 lb. GVWR

Body of your choice
up to 16 ft.*

ISUZU **NPR HD**

CREW CAB
Gas or CNG/LPG Capable
14,500 lb. GVWR

Body of your choice
up to 16 ft.*

* Wheelbase dimension determines maximum body length

TIME-PROVEN PERFORMANCE

In 1984, Isuzu trucks introduced U.S. business owners to a smarter way to work: Isuzu low cab forward trucks were maneuverable and offered a lower cost of ownership. For over thirty years, Isuzu trucks have delivered outstanding performance, durability and remarkable lifecycle value.

BENEFITS OF THE ISUZU LOW CAB FORWARD DESIGN:

Compared to conventional cab trucks, vans and cutaways, the Isuzu Low Cab Forward design delivers:

- More cargo space within a given overall length
- Easier access to the engine compartment via the Isuzu tilt cab design
- Tighter turning diameters
- Driver-friendly entry and exit
- Outstanding driver visibility and maneuverability


Learn more at your local Isuzu truck dealer.




The #1 Selling Low Cab Forward Truck
In The United States Since 1986

N-Series Dimensions

Diesel (Illustrated) Gas (See Charts)

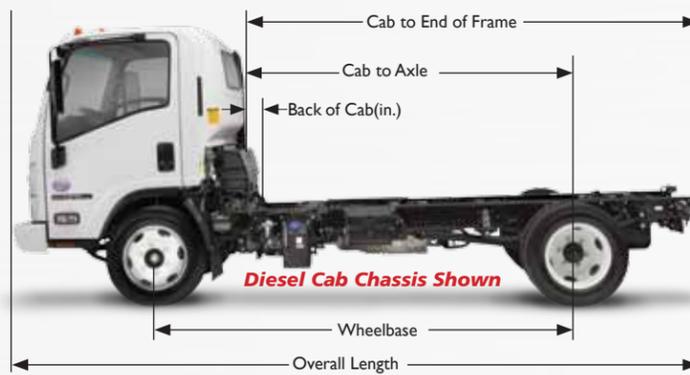

N-SERIES TRUCKS

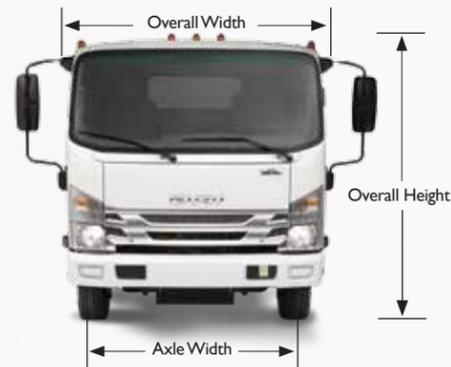

NPR ECO-MAX

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
110.0	87.6	129.8	4.5	200.6	10-12	81.3	65.6	90.8
133.7	111.2	153.5	4.5	224.3	14	81.3	65.6	90.8
151.4	128.9	171.2	4.5	242.0	16-18	81.3	65.6	90.8

NPR-HD, NPR-XD, NQR, NRR

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	7.7	200.5	10-12	81.3	65.6	90.8/92.4*
132.5	110.0	153.1	7.7	224.0	14	81.3	65.6	90.8/92.4*
150.0	127.5	170.6	7.7	241.5	16-18	81.3	65.6	90.8/92.4*
176.0	153.5	196.6	7.7	267.5	18-20	81.3	65.6	90.8/92.4*
200.0 ⁱⁱ	177.5	220.6	7.7	291.5	22	81.3	65.6	92.4 ⁱⁱ
212.0 ⁱⁱⁱ	189.5	232.6	7.7	303.5	24	81.3	65.6	92.4 ⁱⁱ

*NPR-HD only 10.2 **NQR, NRR only ***NRR only **NPR-HD/NPR-XD, NQR, NRR

NPR / NPR-HD GAS

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	6.5	200.5	10-12	81.3	65.6	90.0/90.9
132.5	110.0	153.1	6.5	224.0	14	81.3	65.6	90.0/90.9
150.0	127.5	170.6	6.5	241.5	16-18	81.3	65.6	90.0/90.9
176.0	153.5	196.6	6.5	267.5	18-20	81.3	65.6	90.0/90.9

NPR-HD / NPR-XD / NQR DIESEL CREW CAB

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.3	241.5	12	81.3	65.6	90.8/92.4*
176.0	114.5	157.6	5.3	267.5	16	81.3	65.6	90.8/92.4*

*NPR-HD Crew Cab/NPR-XD Crew Cab, NQR Crew Cab

NPR / NPR-HD GAS CREW CAB

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.0	241.5	12	81.3	65.6	90.0/91.1
176.0	114.5	157.6	5.0	267.5	16	81.3	65.6	90.0/91.1

2016 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle miles*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited Unlimited	No Charge 50%	No Charge 50%
Engine Emissions Control System - Federal	0-5 Years	0-100,000	No Charge	No Charge
California Emissions Performance: NPR	0-3 Years	0-50,000	No Charge	No Charge
California Emissions Long-Term Defects: NPR	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years 0-4 Years	0-24,000 Unlimited	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first.

See your authorized Isuzu dealer for warranty details.

2016 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle miles*	Parts	Labor
Basic (See "What's covered")	0-3 Years	0-36,000	No Charge	No Charge
Engine	0-5 Years	0-75,000	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers	0-5 Years	0-75,000	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	0-36,000 Unlimited	No Charge 50%	No Charge 50%
Federal Emissions	0-5 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System (NPR model) California	0-3 Years	0-50,000	No Charge	No Charge
Engine Emissions Control System (NPR model) California	0-7 Years	0-70,000	No Charge	No Charge
Tires	0-2 Years	0-24,000	No Charge	No Charge
Corrosion (Rust Through)	0-4 Years	Unlimited	No Charge	No Charge

GAS N-SERIES SPECIFICATIONS

	NPR GAS	NPR GAS CREW CAB	NPR-HD GAS	NPR-HD GAS CREW CAB
GVWR/GCWR	12,000/18,000 lbs.	12,000/18,000 lbs.	14,500/20,500 lbs.	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	6,826- 6,994 lbs.	6,186-6,241 lbs.	9,276 -9,408 lbs.	8,636 -8,682 lbs.
GAWR Front Rear	4,860 lbs. 8,840 lbs.	4,860 lbs. 8,840 lbs.	6,630 lbs. 11,020 lbs.	6,630 lbs. 11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 5.125	11,020 lbs. 5.125	11,020 lbs. 5.375	11,020 lbs. 5.375
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-ft./in.			
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum			
TRANSMISSION	6L90 6-speed auto. with double overdrive and lock-up converter			
ENGINE Displacement Engine Power Engine Torque	GMPT L96 (Gen IV) V8 Vortec 6000 KL8 (Alternative Fuel Capable Engine) 6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm	GMPT L96 (Gen IV) V8 Vortec 6000 KL8 (Alternative Fuel Capable Engine) 6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm	GMPT L96 (Gen IV) V8 Vortec 6000 KL8 (Alternative Fuel Capable Engine) 6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm	GMPT L96 (Gen IV) V8 Vortec 6000 KL8 (Alternative Fuel Capable Engine) 6.0L (365 in. ³) 297hp @ 4,300 rpm 372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional
ALTERNATOR	145-amp	145-amp	145-amp	145-amp
BATTERIES	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	225/70R19.5G (14-pr) Standard	225/70R19.5G (14-pr) Standard
STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic
FUEL TANK Standard	30 Gal. in-frame	30 Gal. in-frame	30 Gal. in-frame	30 Gal. in-frame



DIESEL N-SERIES SPECIFICATIONS	NPR ECOMAX	NPR-HD	NPR-HD CREW CAB	NPR-XD	DIESEL N-SERIES SPECIFICATIONS (Continued)	NPR-XD CREW CAB	NQR	NQR CREW CAB	NRR	
GVWR/GCWR	12,000/18,000 lbs.	14,500/20,500 lbs.	14,500/20,500 lbs.	16,000 lbs./22,000 lbs.	GVWR/GCWR	16,000 lbs./22,000 lbs.	17,950/23,950 lbs.	17,950/23,950 lbs.	19,500/25,500 lbs.	
BODY/PAYLOAD ALLOWANCE	6,510-6,649 lbs.	8,339-8,536 lbs.	7,766-7,832 lbs.	9,410-9,607 lbs.	BODY/PAYLOAD ALLOWANCE	8,840-8,905 lbs.	10,939-11,461 lbs.	10,680-10,748 lbs.	12,294-12,875 lbs.	
GAWR <i>Front</i> <i>Rear</i>	5,360 lbs. 8,840 lbs.	5,360 lbs. 9,880 lbs.	5,360 lbs. 9,880 lbs.	6,630 lbs. 11,020 lbs.	GAWR <i>Front</i> <i>Rear</i>	6,630 lbs. 11,020 lbs.	6,830 lbs. 12,980 lbs.	6,830 lbs. 12,980 lbs.	7,275 lbs. 13,660 lbs.	
FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	7,275 lbs.	
REAR AXLE CAPACITY <i>Ratio</i>	11,020 lbs. 5.125	11,020 lbs. 4.555	11,020 lbs. 4.555	11,020 lbs. 4.777	REAR AXLE CAPACITY <i>Ratio</i>	11,020 lbs. 4.777	14,550 lbs. 5.125	14,550 lbs. 5.125	14,550 lbs. 5.571	
SUSPENSION F/R SPRINGS <i>Capacity</i>	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 8,440/14,308 lbs.	SUSPENSION F/R SPRINGS <i>Capacity</i>	Tapered/Multi-Leaf 8,440/14,308 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	
FRAME <i>Section Modulus</i> <i>Resistance Bending Moment</i>	6.07 in. ³ 267,080 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	11.89 in. ³ 523,160 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	FRAME <i>Section Modulus</i> <i>Resistance Bending Moment</i>	11.89 in. ³ 523,160 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	11.89 in. ³ 523,160 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	
SERVICE BRAKES <i>Front/Rear</i>	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	SERVICE BRAKES <i>Front/Rear</i>	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	
EXHAUST BRAKE	Standard	Standard	Standard	Standard	EXHAUST BRAKE	Standard	Standard	Standard	Standard	
TRANSMISSION	Aisin A460 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	
ENGINE <i>Displacement</i> <i>Engine Power</i> <i>Engine Torque</i>	Isuzu 4JJI-TC turbocharged intercooled diesel 3.0L (183 in. ³) 150hp @ 2,800 rpm 282 lb.-ft. @ 1,600-2,800 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	ENGINE <i>Displacement</i> <i>Engine Power</i> <i>Engine Torque</i>	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Isuzu 4HKI-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm
<i>Oil Level Indicator</i>	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	<i>Oil Level Indicator</i>	Dash-mounted oil level check switch and light				
LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional	LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional	
ALTERNATOR	140-amp	140-amp	140-amp	140-amp	ALTERNATOR	140-amp	140-amp	140-amp	140-amp	
BATTERIES	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	BATTERIES	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	225/70R19.5F (12-pr) Standard	TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	
STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	
STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	
FUEL TANK <i>Standard</i> <i>Optional</i>	25 Gal. in-rail	30 Gal. in-rail 33 Gal. side mount (176" WB Only)	30 Gal. in-rail N/A	30 Gal. in-rail 33 Gal. side mount (176" WB Only)	FUEL TANK <i>Standard</i> <i>Optional</i>	30 Gal. in-rail	30 Gal. in-rail 33 Gal. side mount (176" WB Only)	30 Gal. in-rail N/A	30 Gal. in-rail 33 Gal. side mount (176" WB Only)	
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light				

ISUZU

Isuzu interiors are designed to make the driver more comfortable and improve efficiency while enhancing productivity.

- New optional keyless entry system
- Optional remote control mirrors
- Optional locking DEF tank cap
- Optional additional side rail-mounted fuel tank
- Optional bluetooth capable sound system
- Storage areas in the dash, door seatback pockets, overhead shelf and rear organizer tray
- In-cab access to, windshield washer reservoir, brake fluid reservoir, relays, fuses and engine oil level



Standard interior seats shown



Optional seat covers shown



Crew cab has 7-passenger capacity with 4-across seating in back



Bluetooth Microphone

Driver overhead shelf includes remote outside mirror controls

